

ADVOC CERAMIC

8-A National Highway, Sartanpar Road,
At. Ratavirda, Tal : Wankaner, Morbi-363642 (Guj.) India.

 +91 90992 96699  info@advocceramic.com





The Company

Advoc Ceramic is a renowned name amongst Indian ceramic tiles exporters, which is engaged in supplying a comprehensive array of high quality ceramic products are Floor Tiles, Vitrified Tiles, Porcelain Tiles, Ceramic Wall Tiles and decorative tiles.

The company carries the vision to provide world class Ceramic tiles. It believes in producing superior quality Ceramic tiles with sharp vision on market. It takes a lot of skills to design and manufacture in a competitive market, but the company has a track record of many successful years as a leading ceramic company.

At Advoc Ceramic, we recognize our responsibilities and trust bestowed by our clients when they select us as their suppliers; we make sure that we delight them each and every time with our Quality Products, Timely Delivery, and Precise Communication & Professional Approach.



Floor Tile



Water Resistance



Indoor Use



Stain Resistance



**NANO
SOLUBLE
SALT**

**FULL
BODY
RECTIFIED**



8001



8002



8003



8005



8006



8007




8008



8009



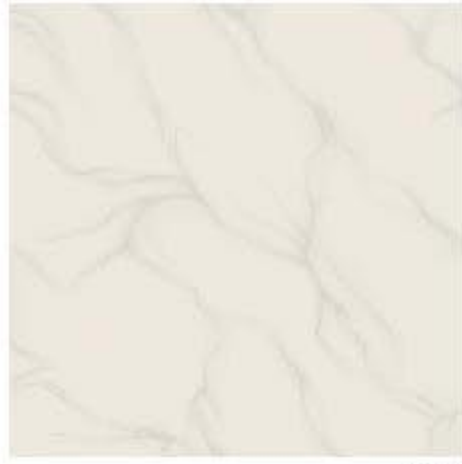

8010



8012



8013



8014



8016



8018



8019



8024



Floor Tile



Water Resistance



Indoor Use



Stain Resistance



NANO SOLUBLE SALT

FULL BODY RECTIFIED





8029



8032



8034



8037



8046



8047



Floor Tile



Water Resistance



Indoor Use



Stain Resistance



600x
600mm


**NANO
SOLUBLE
SALT**

**FULL
BODY
RECTIFIED**






IVORY

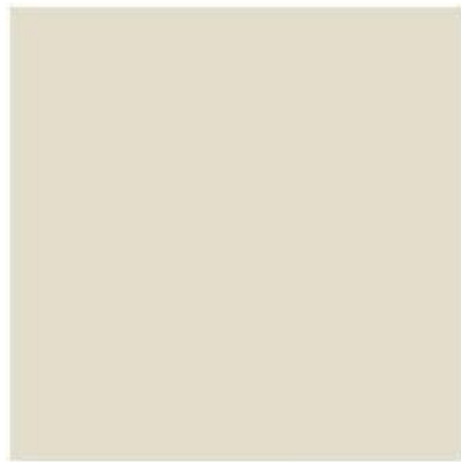

IVORY MATT




IVORY PLUS

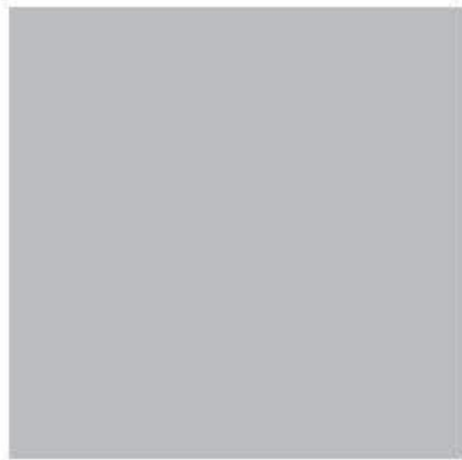


ROYAL GREY



ROYAL GREY MATT

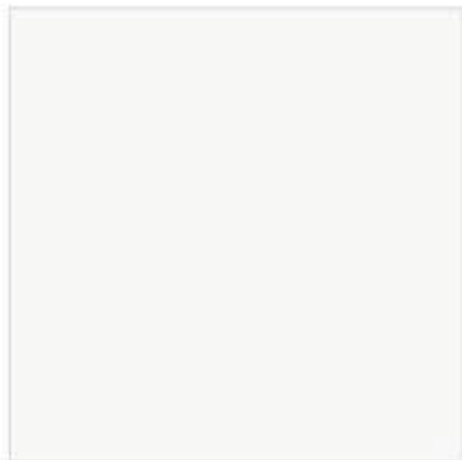

ITALIAN WHITE

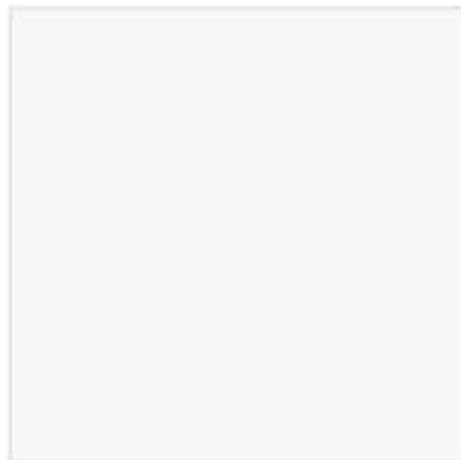

ITALIAN WHITE MATT



Floor Tile



Water Resistance



Indoor Use



Stain Resistance



NANO SOLUBLE SALT

FULL BODY RECTIFIED

TECHNICAL SPECIFICATION

NO.	PROPERTY	INTERNATIONAL Std ISO 3006/EN178 Group BIIa	ADVOC	METHOD OF TESTING
1	Deviation in Length	±0.5 %	±0.1 %	EN 98
2	Deviation in Thickness	±0.5 %	±0.1 %	EN 98
3	Straightness of Sides	±0.5 %	±0.1 %	EN 98
4	Rectangularity	±0.5 %	±0.2 %	EN 98
5	Surface Flatness	±0.5 %	±0.2 %	EN 98
6	Water Absorption*	> 0.5 %	> 0.03 %	EN 99
7	Mohs Hardness*	> 6	> 8	EN 101
8	Flexural Straightness	> 27 N/mm ²	> 47 N/mm ²	EN 100
9	Abrasion Resistance	< 204 mm ³	< 144 mm ³	EN 102
10	Skid Resistance (Friction Coefficient)	< 0.4	< 0.6	ASTM C-1028
11	Breaking Strength*	1113 N	2830 N	ASTM C-648
12	Density (g/cc)	> 2	2.4	DIN 51082
13	Frost Resistance	Frost Proof	Frost Proof	EN 202
14	Chemical Resistance	No Damage	No Damage	EN 106
15	Thermal Shock Resistance	No Damage	No Damage	EN 104
16	Color Resistance	No Damage	No Damage	DIN 51094
17	Stain Resistance	Resistance	Resistance	ISO 10545-14
18	Moisture Resistance	Nil	Nil	ISO 10545-10
19	Glossiness	----	Mn 65%-70% Reflection	Glossmeter

PACKING DETAILS

SIZE	NO. OF TILES PER BOX	COVERAGE AREA
600 X 600 MM	4 PCS. / BOX	1.44 Sq. Mtr.

APPLICATION



Airport



Gymnasium



Home



Hospital



Super Market



Multiplex



Hotel



School



Religion Place



Bank



Dance Mall



Industry